



Definition

Symmetrical metal barrier reduced for median strip. System formed by two double wave barriers and C posts 1.33 metres apart.

Performance parameters



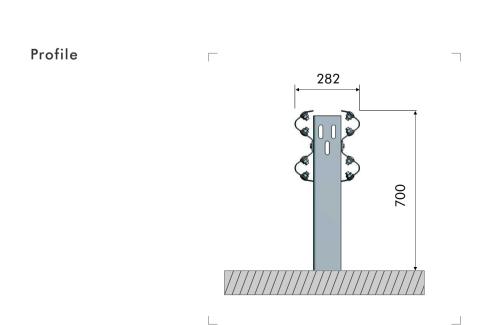

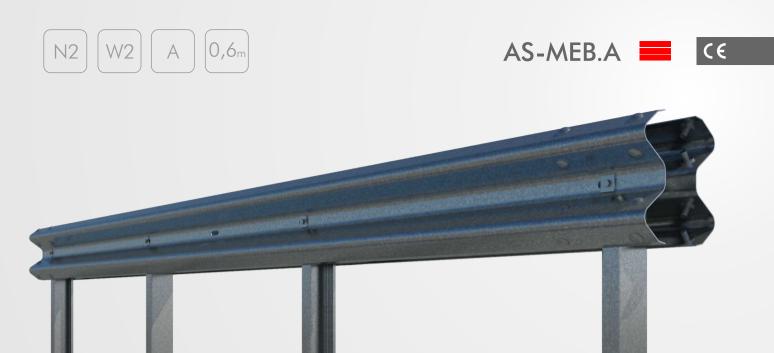


Components for sections of 4 m

asebal≡

| Item | Part | Uds |
|------|---|-----|
| 1 | Standard barrier of 4 m (punched holes every 1.33 mm) | 2 |
| | | |
| 2 | C post-120 of 1,500 mm | 3 |
| | | _ |
| 3 | Reflector | 1 |
| | | _ |
| 4 | Round head bolt M 16x30, with nut | 16 |
| | | _ |
| 5 | Hexagon head cap bolt M10x40 | 6 |
| | | _ |
| 6 | Nut M10 | 12 |
| | | _ |
| 7 | Washer Ø17x35x4 mm | 16 |
| | | _ |
| 8 | Square washer 40x40x5 mm | 12 |

Fasteners



Vehicle Restraint System

