

H2 W3 B 0,7_m

AS-MA2.A  CE



asebal 

Vehicle Restraint System


Definition

Steel and wood combined system for lateral side, formed by a metal barrier with spacer, and C posts 2 metres apart. The barrier and posts are covered in wood.

Performance parameters

Containment level	H2	Working width (W)	W3	Impact Severity	B	Dynamic Deflection (D)	0,7_m
-------------------	-----------	-------------------	-----------	-----------------	----------	------------------------	------------------------

Profile

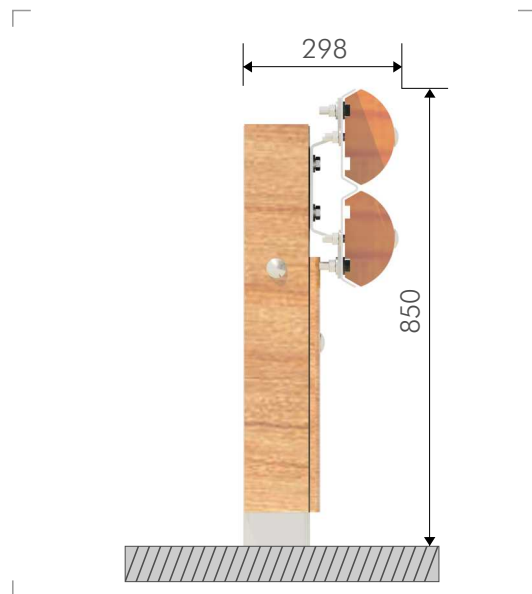



Components for sections of 4 m

Item	Part	Uds
1	Flat barrier with central nose of 4,300x392x4 mm	1
2	C Post-130x70x6 of 2,000 mm	2
3	Trapezoidal spacer 550x354x6 mm	2
4	Bolt DIN 603 M16x40	10
5	Bolt DIN 603 M16x60	2
6	Hexagon head cap bolt DIN 933 M16x50	22
7	Nut DIN 934 M16	34
8	Washer Ø17x35x4	56
9	Wooden lateral protector for post 735x125x20 mm	4
10	Wooden front protector for post 500x105x20 mm	2
11	Wooden crossbeam Ø200 mm and 3,990 mm	2

Fasteners

