


H1 W3 A 0,9_m

AS-BL1.C  CE

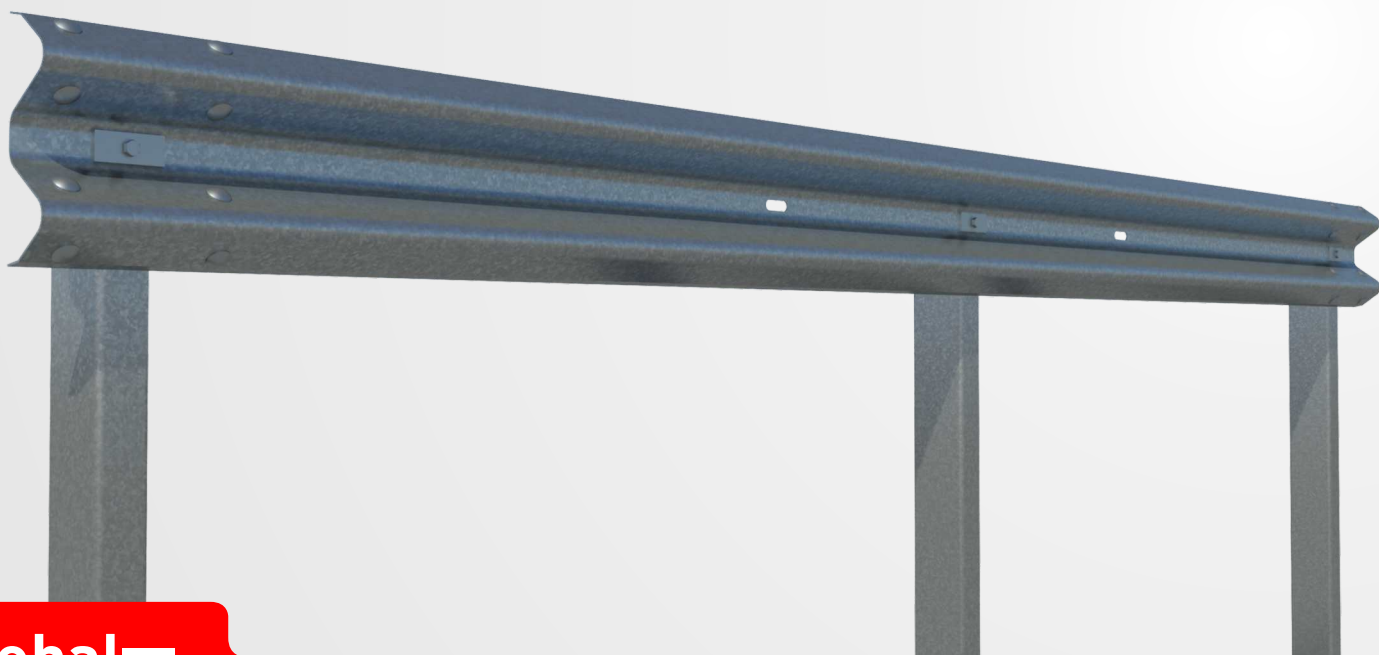

asebal 

Vehicle Restraint System


Definition

Single metal barrier reduced for lateral side. System formed by a double wave barrier and C posts 2 metres apart.

Performance parameters

Containment level	H1	Working Width (W)	W3	Impact Severity	A	Dynamic Deflection (D)	0,9_m
-------------------	-----------	-------------------	-----------	-----------------	----------	------------------------	------------------------

Profile

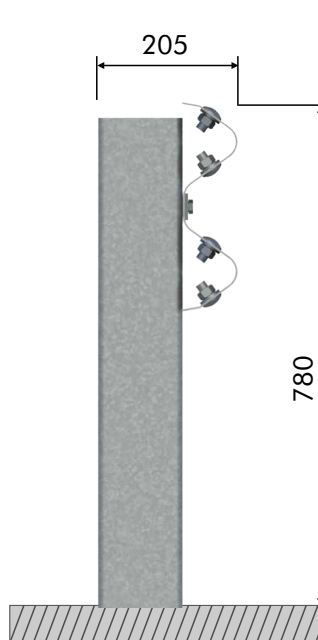


H1 W3 A 0,9_m

AS-BL1.C



CE

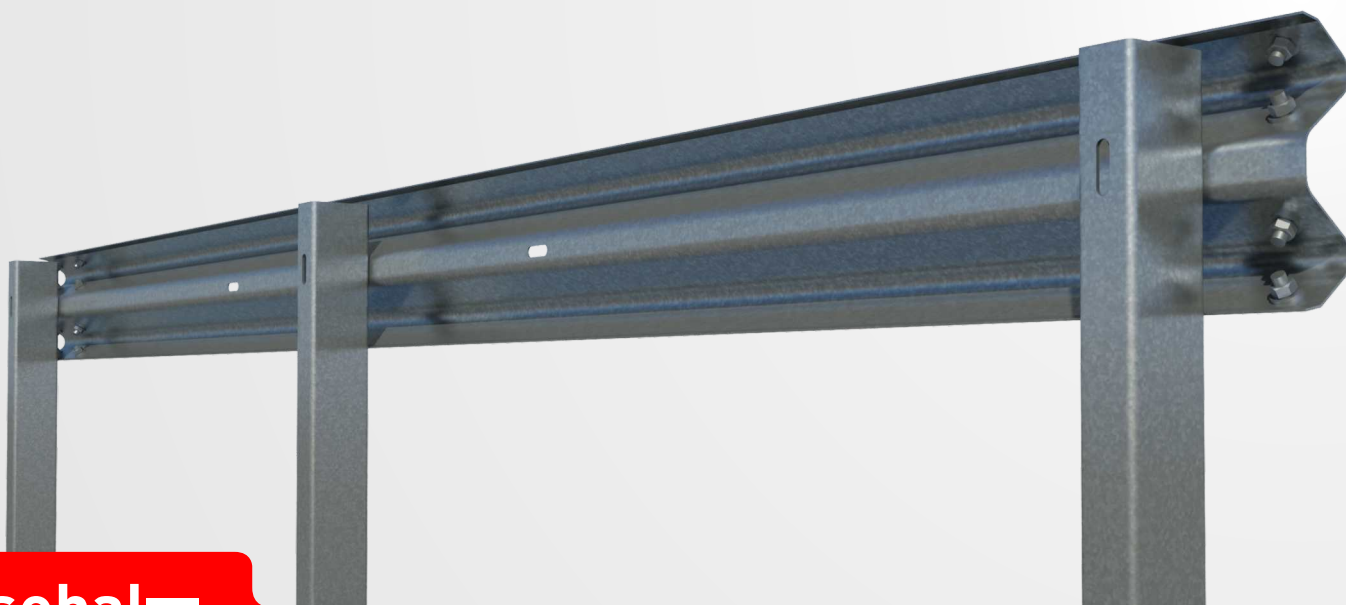

asebal

Vehicle Restraint System

Components for sections of 4 m

Item	Part	Uds
1	Standard barrier of 4 m (Perforated at intervals of 1,33 m.)	1
2	C post-125x75x20x5 1,600 mm	2
3	Washer Ø17x35x4 mm	8
4	Hexagon nut M16 class 5	8
5	Round head bolt M16x30	8
6	Washer 40x40x5 mm Ø13 for M12	2
7	Hexagon head cap bolt DIN 933 M12x40	2
8	Washer 100x40x5 mm Ø13 for M12	2
9	Nut DIN 934 M12	2

Fasteners

