


H1 W4 A 1,2_m VI7

AS-BL1.F



CE

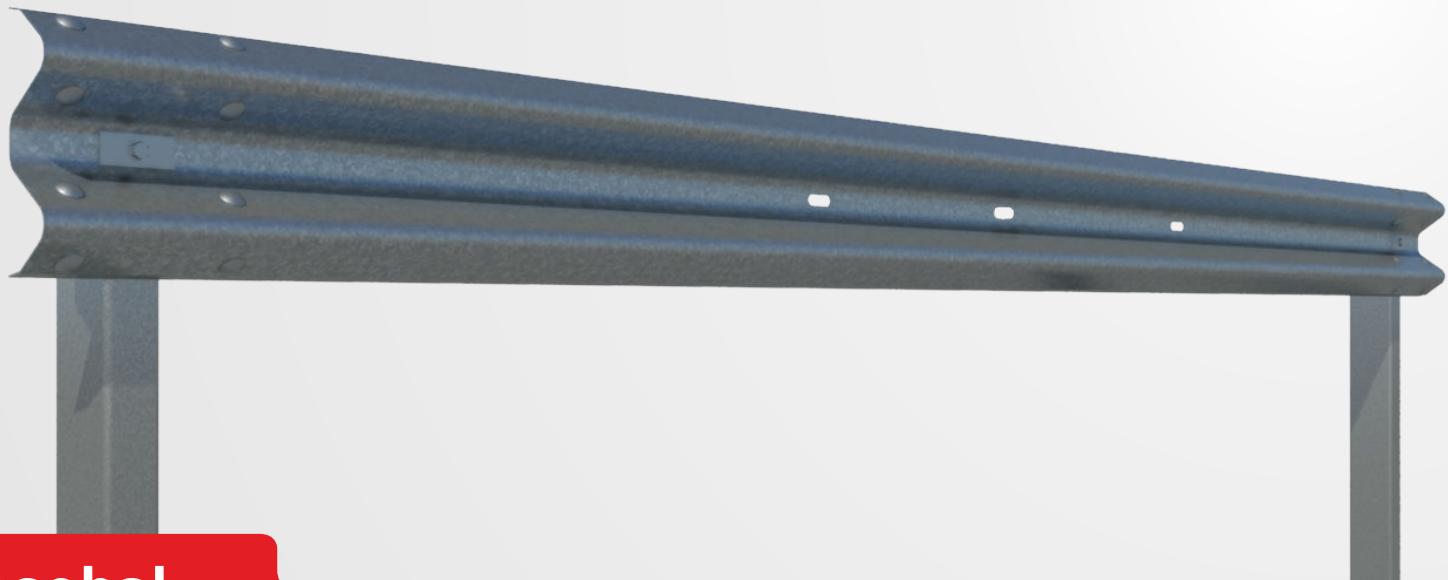

asebal

Vehicle Restraint System


Definition


Single metal barrier reduced for lateral side. System formed by a double wave barrier and C posts 4 metres apart.

Performance parameters

Containment level	H1	Working Width (W)	W4	Impact Severity	A	Dynamic Deflection (D)	1,2_m
Intrusion (I)		VI7					

Profile

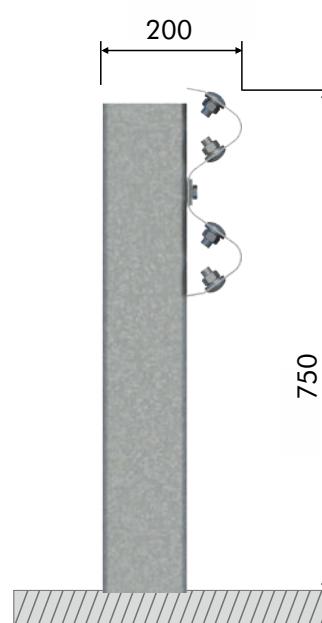

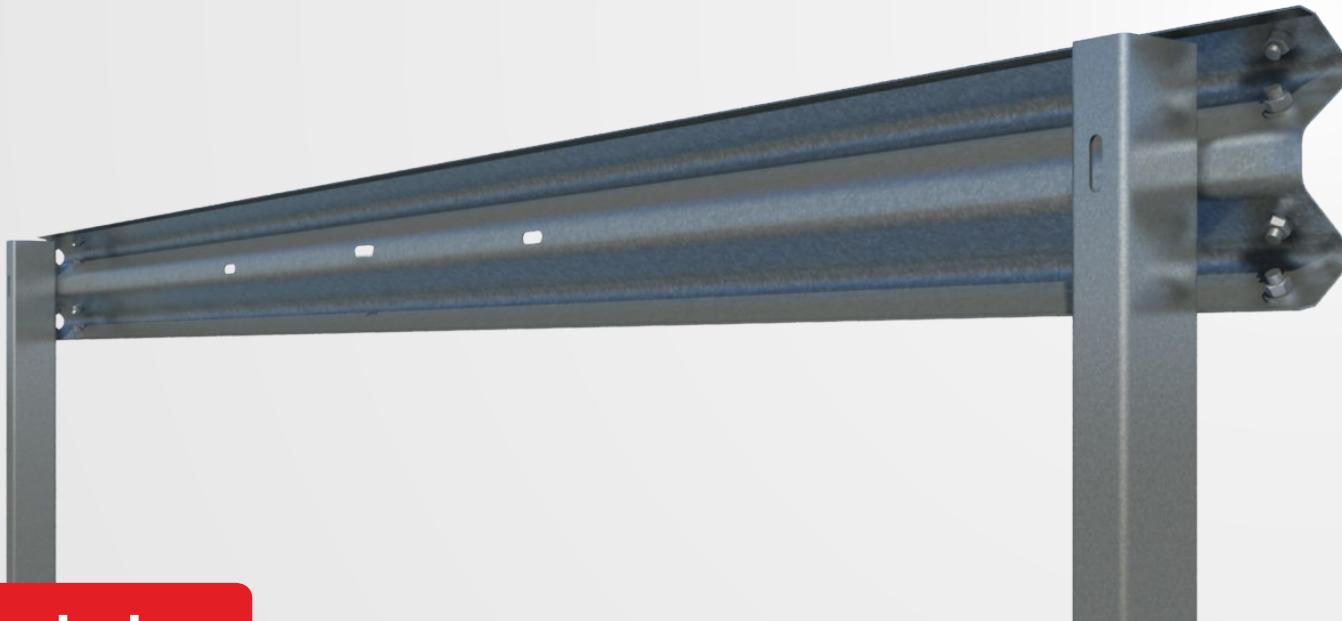


asebal

Vehicle Restraint System

Components for sections of 4 m

Item	Part	Uds
1	Standard barrier of 4 m with central punching and at every 1.33 m	1
2	C post-120 1,500 mm with double welded reinforcement	1
3	Round head bolt M16x30	8
4	Washer Ø17x35x4 mm	8
5	Hexagon nut M16 class 5	8
6	Hexagon head cap bolt DIN 933 M12x40	1
7	Washer 100x40x5 mm Ø13 for M12	1
8	Washer 40x40x5 mm Ø13 for M20	1
9	Nut DIN 934 M12	1

Fasteners

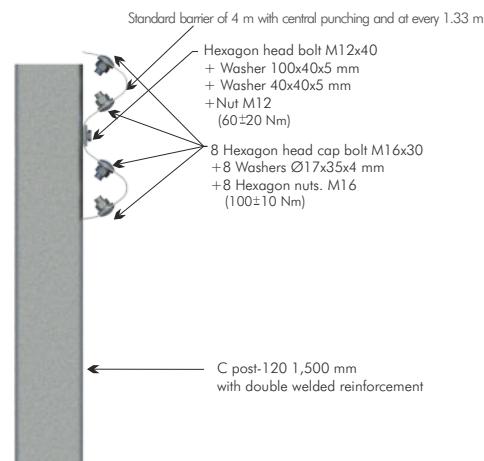

Detail of joint between barriers